(54) Title: DATABASES SYNCHRONIZATION
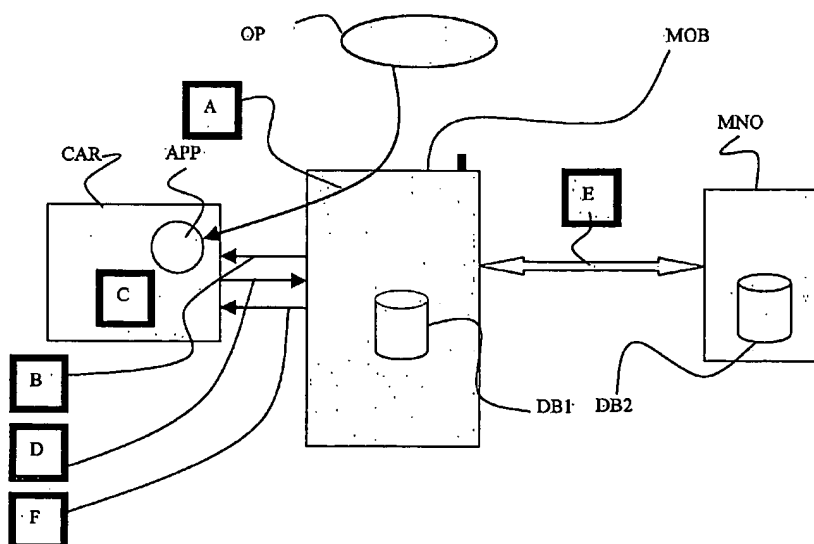
(57) Abstract: 1) A method for synchronizing databases (DB1, DB2), a first database (DB1) being stored in a first data processing system (MOB), a second database (DB2) being stored in a second data processing system (MNO), said method comprising: a. A loading step in which an application (APP) is loaded into said first data processing system (MOB); b. An execution step in which the application (APP) executes a command; c. A requesting step in which said command requests the first data processing system (MOB) to process a synchronization step, said command providing the first data processing system (MOB) with the information about the synchronization parameters to be used for synchronizing the content of the first (DB1) and the second (DB2) databases, said method being characterized in that said first data processing system (MOB) includes a security token (CAR) controlled by an operator (OP) and in that said application (APP) is loaded into said security token (CAR).

SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:
— *of inventorship (Rule 4.17(iv)) for US only*

Published:
— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.